


WKMP41.41

Ausleger und Hängestiel MP41.41

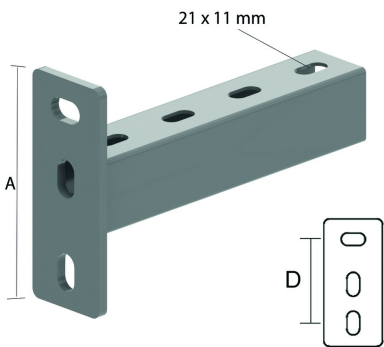

Standardausführung	Elektrolytisch verzinkt
Ausführung Option	Tauchfeuerverzinkt

	Max. Belastung (in daN)	A	D
WKMP41.41.300	500	132	93
WKMP41.41.400	350	132	93
WKMP41.41.500	275	132	93
WKMP41.41.600	200	132	93
WKMP41.41.750	180	132	93
WKMP41.41.1000	130	132	93

HD	Referenz	 mm	 mm	 mm	 mm	kg/stk		Lager	Einheit
HD	WKMP41.41.300	132	300			0,900	1	X	STK
HD	WKMP41.41.400	132	400			1,100	1	X	STK
HD	WKMP41.41.500	132	500			1,300	1	X	STK
HD	WKMP41.41.600	132	600			1,500	1	X	STK
HD	WKMP41.41.750	132	750			1,800	1	X	STK
HD	WKMP41.41.1000	132	1000			2,300	1	X	STK

Max. Belastung (in daN): Gleichmäßig verteilte Last über die gesamte Breite des Auslegers.

Bei der Verwendung mit Kabelleitern achten Sie auf die Länge.