


I4WK

Welded bracket

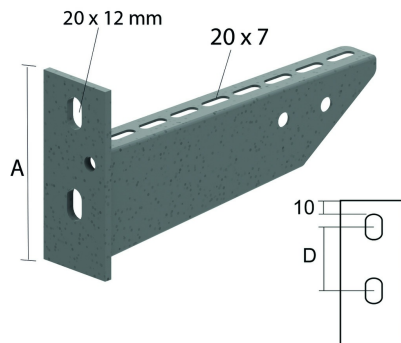

For direct fixing on the wall or on ceiling profiles.

Standard finish

Stainless Steel 304

Width	Max. load (daN)	A	D
100	360	98	38
150	300	102	42
200	240	106	46
300	250	114	54
400	260	122	62
500	220	130	70
600	180	138	78

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Unit
-	I4WK100	98	117			0,300	24		STK
-	I4WK150	102	167			0,360	24		STK
-	I4WK200	106	217			0,430	12		STK
-	I4WK300	114	317			0,730	12		STK
-	I4WK400	122	417			0,880	6		STK
-	I4WK500	130	517			1,300	6		STK
-	I4WK600	138	617			1,600	6		STK

For fixing on the ceiling profile, the necessary fixing set is to be ordered separately: sliding nut I6PNP10 and bolt I6B10.20.
Max. load (in daN): Uniformly distributed load (UDL) over complete width of cantilever brackets.

Pickled and passivated.