

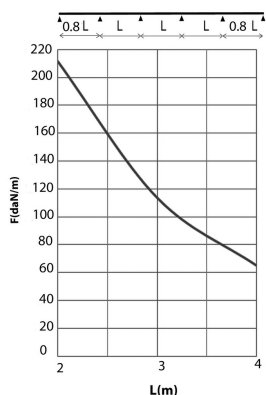


# HDKS60

## Cable ladder DAVID

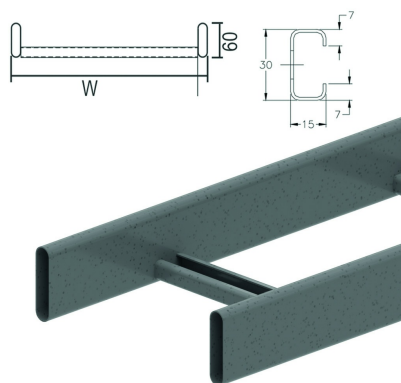

Fix with:



Joiner for HDKS  
HDSSU

Tubular side walls.  
Perforated C-rungs 15x30

Standard finish

Hot-dip galvanised

HD	Reference	mm	mm	mm	mm	kg/m		Stock	Unit
-	<b>HDKS60.200</b>	60	200		6000	2,800	60	X	M
-	<b>HDKS60.300</b>	60	300		6000	3,080	60	X	M
-	<b>HDKS60.400</b>	60	400		6000	3,320	60	X	M
-	<b>HDKS60.500</b>	60	500		6000	3,530	60	X	M
-	<b>HDKS60.600</b>	60	600		6000	3,870	60	X	M

### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

### CHARACTERISTICS

- lightweight
- strong
- rounded tubular side-walls eliminate the risk of cable damage
- hot-dip galvanised as standard
- wrap around joiners with pre-assembled tap bolts ensure a fast secure connection
- rungs are perforated to enable efficient attachment of cables.
- partition (ZMSLOS35) can be fixed to the cable ladder with a sliding nut (GM6) and pan head bolt (HDRB6.10).

### TECHNICAL INFORMATION

- Side walls are constructed from tubular section 60 mm x 15 mm.
- C-rungs are fixed at 250 mm intervals.
- Rungs are welded to the side wall of the cable ladder.
- Rungs are alternately placed with openings upwards and downwards.