


HDKSR60

Cable ladder DAVID tubular rungs

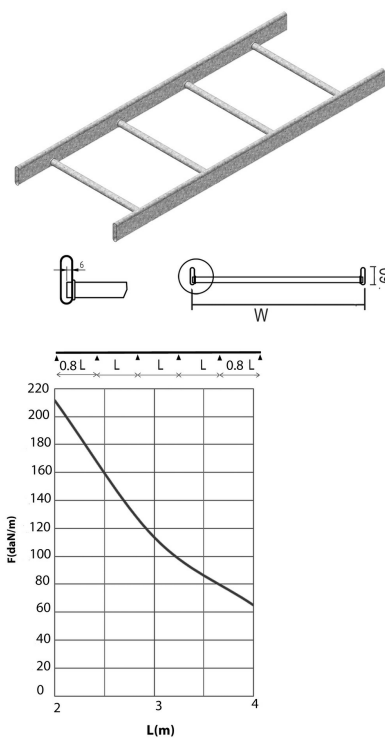

Standard finish		Hot-dip galvanised							
HD	Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
-	HDKSR60.200	60	200		6000	2,700	60		M
-	HDKSR60.300	60	300		6000	2,940	60		M
-	HDKSR60.400	60	400		6000	3,180	60		M
-	HDKSR60.500	60	500		6000	3,430	60		M
-	HDKSR60.600	60	600		6000	3,670	60		M

LOAD DIAGRAM
This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)
 L = support distance (m)
Max. deflection (m) = $L/100$

- CHARACTERISTICS**
- lightweight
 - rounded tubular side-walls eliminate the risk of cable damage.
 - side walls have closed ends.
 - does not accumulate dust

- TECHNICAL INFORMATION**
- Side walls are constructed from tubular section 60 mm x 15 mm.
 - Ø 19 mm tubular rungs are fixed at 250 mm intervals.
 - rungs are welded to the side wall of the cable ladder.