

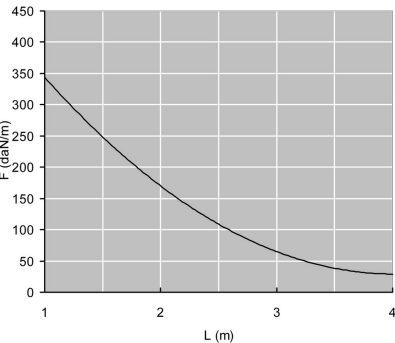


KL60

Cable ladder

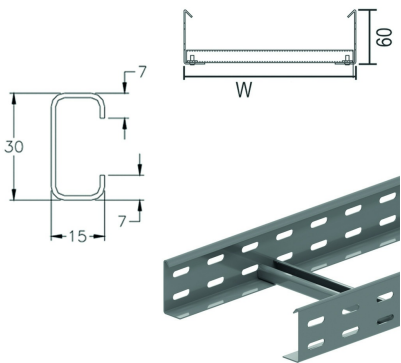

Fix with:

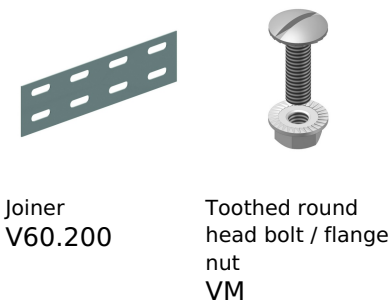

Side walls: perforated L-profile
C-rungs

Standard finish		Pre-galvanised							
HD	Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m		Stock	Unit
-	KL60.200	60	200		3000	2,370	24	X	M
-	KL60.300	60	300		3000	2,570	24	X	M
-	KL60.400	60	400		3000	2,770	24	X	M
-	KL60.500	60	500		3000	2,970	24	X	M
-	KL60.600	60	600		3000	3,200	24	X	M

LOAD DIAGRAM
This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

- CHARACTERISTICS**
- lightweight
 - strong
 - partition (SLOS35) can be fixed to the cable ladder by means of a sliding nut GM6 and pan head bolt (RB6.10)
 - all accessories for cable tray height 60 mm can also be mounted on this KL cable ladder
 - no further coupling holes are required if the cable ladder is cut.

TECHNICAL INFORMATION
Side walls are constructed from L profile with a return flange and are continuously perforated.
C-profile rungs are fixed at 300 mm intervals.
Rungs are attached to the side walls of the cable ladder by means of cold fusion. The rung openings are directed upwards.