


KLLI60.6

Cable ladder interlocking ends

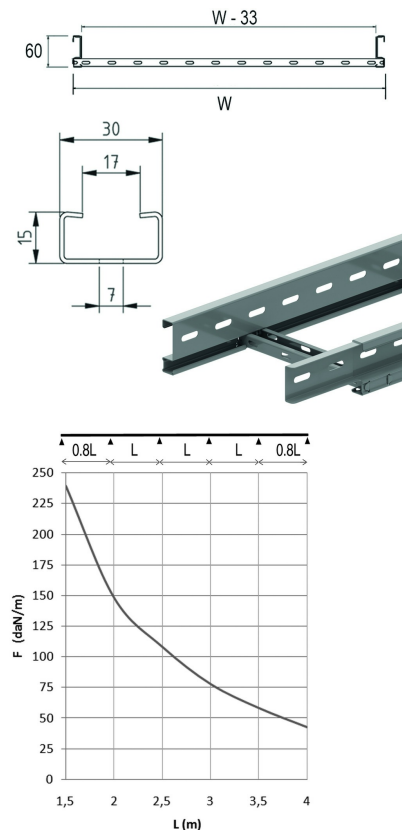

Side walls: perforated S-profile
Perforated C rungs 15x30


Standard finish

Pre-galvanised

Optional finish

HD	Reference	mm	mm	mm	mm	kg/m	Stock	Unit
-	KLLI60.150.6	60	150	1	6000	2,142	30	M
-	KLLI60.200.6	60	200	1	6000	2,261	30	M
-	KLLI60.300.6	60	300	1	6000	2,499	30	M
-	KLLI60.400.6	60	400	1	6000	2,736	30	M
-	KLLI60.500.6	60	500	1	6000	2,974	30	M
-	KLLI60.600.6	60	600	1	6000	3,212	30	M
-	KLLI60.800.6	60	800	1	6000	3,687	30	M
-	HDKLLI60.150.6	60	150		6000	2,142	6	M
-	HDKLLI60.200.6	60	200		6000	2,261	6	M
-	HDKLLI60.300.6	60	300		6000	2,499	6	M
-	HDKLLI60.400.6	60	400		6000	2,736	6	M
-	HDKLLI60.500.6	60	500		6000	2,974	6	M
-	HDKLLI60.600.6	60	600		6000	3,212	6	M
-	HDKLLI60.800.6	60	800		6000	3,687	6	M
-	ZMKLLI60.150.6	60	150	1	6000	2,142	30	X M
-	ZMKLLI60.200.6	60	200	1	6000	2,261	30	X M
-	ZMKLLI60.300.6	60	300	1	6000	2,499	30	X M
-	ZMKLLI60.400.6	60	400	1	6000	2,736	30	X M
-	ZMKLLI60.500.6	60	500	1	6000	2,974	30	X M
-	ZMKLLI60.600.6	60	600	1	6000	3,212	30	X M
-	ZMKLLI60.800.6	60	800	1	6000	3,687	30	M

Fix with:

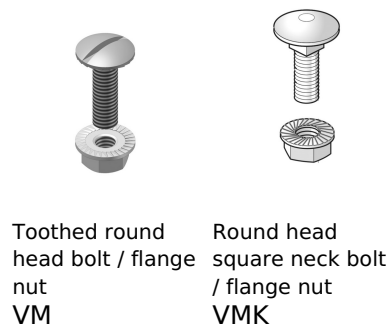

Toothed round head bolt / flange nut
VM

Round head square neck bolt / flange nut
VMK

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

CHARACTERISTICS

- lightweight
- strong
- interlocking
- partition (SLOS35) can be fixed to the cable ladder with a sliding nut (GM6) and pan head bolt (RB6.10)
- no further coupling holes are required if the cable ladder is cut
- use joiners (KLLKP60) and bolts (VM6.10) to join the cut lengths of cable ladder
- no joiners are required to attach accessories such as bends, tees etc.
- rungs are perforated to enable efficient attachment of cables.

TECHNICAL INFORMATION

Side walls are constructed from S profile with a return flange and are

continuously perforated.

C-profile rungs are fixed at 250 mm intervals.

Rungs are mechanically attached to the side wall of the cable ladder.

Rungs are alternately placed with openings upwards and downwards.