


KBWW

Cable ladder 200 with floor plate

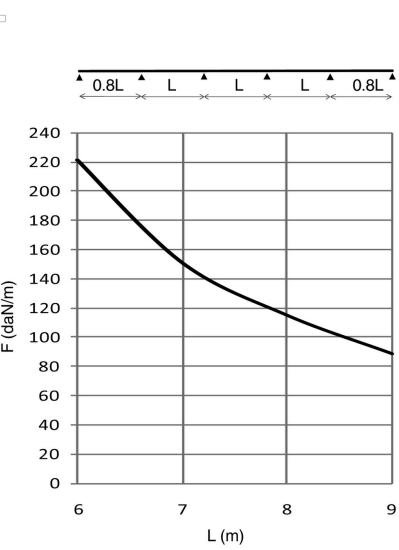

Cable ladder for large support distances up to 9 metres
Perforated C datarungs 41x21
With floor plate

Standard finish		Pre-galvanised							
HD	Reference	mm	mm	mm	mm	kg/m		Stock	Unit
-	KBWW200	200	200		6000	10,986	6		M
-	KBWW300	200	300		6000	11,942	6		M
-	KBWW400	200	400		6000	12,899	6		M
-	KBWW500	200	500		6000	13,855	6		M
-	KBWW600	200	600		6000	14,811	6		M

LOAD DIAGRAM
Graph valid for KLV. This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537

Fix with:



F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/200

- CHARACTERISTICS**
- strong
 - useable inner height 177 mm, ideal for large diameter cables
 - no further coupling holes are required if the cable ladder is cut
 - no joiners are required to attach accessories such as bends, tees etc.
 - rungs are perforated to enable efficient attachment of cables
 - partition (SLOS110) can be fixed to the cable ladder with a sliding nut (PNP06) and pan head bolt (RB6.20).

- TECHNICAL INFORMATION**
- Side walls are constructed from S profile with a return flange and are continuously perforated
 - C-profile rungs are fixed at 300 mm intervals.
 - rungs are mechanically attached to the side wall of the cable ladder.
 - rungs are alternately placed with openings upwards and downwards.