

KBS35

Perforated cable tray




Alternative perforation
Return flanges

Standard finish		Pre-galvanised							
HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
-	KBS35.050.075	35	50	0,75	3000	0,680	150	X	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

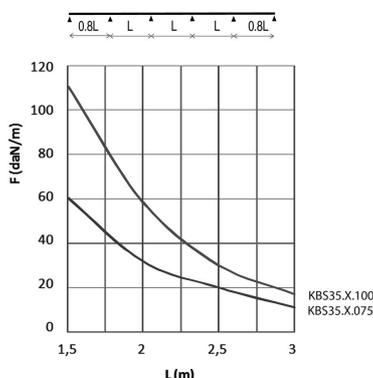

CHARACTERISTICS

Embedded perforations for:

- extra load capacity
- better aeration
- better stability
- better condensation drainage

Alternative perforations for:

- better fixing to supports
- very useful for attaching cables

Fix with:

TECHNICAL INFORMATION

KBS35.050.075: no knock-out facility (pre-shaped holes).



Joiner for fast mounting
V35



Joiner
V35.200



Toothed round head bolt / flange nut
VM