


KBS35

Perforated cable tray

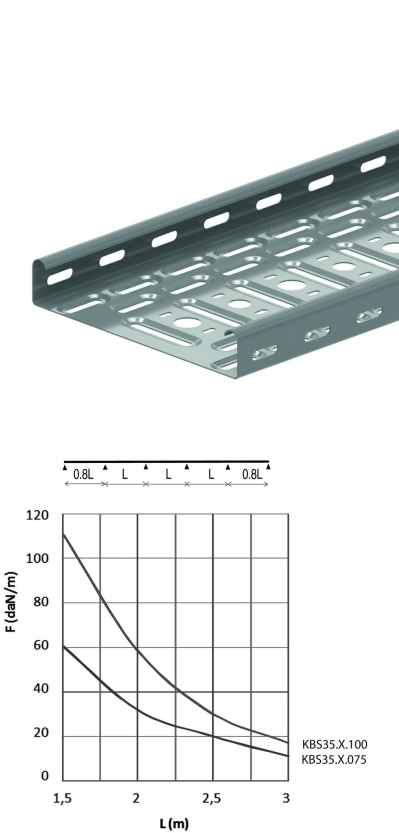

Alternative perforation  
Return flanges

Standard finish		Pre-galvanised							
HD	Reference	<div>↕</div> <div>mm</div>	<div>↔</div> <div>mm</div>	<div>→  ←</div> <div>mm</div>	<div>↔↔</div> <div>mm</div>	kg/m	<div>📦</div>	Stock	Unit
-	KBS35.050.075	35	50	0,75	3000	0,680	150	X	M

**LOAD DIAGRAM**  
This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)  
L = support distance (m)  
Max. deflection (m) = L/100

**CHARACTERISTICS**  
Embedded perforations for:


- extra load capacity
- better aeration
- better stability
- better condensation drainage

Alternative perforations for:

- better fixing to supports
- very useful for attaching cables

Fix with:

**TECHNICAL INFORMATION**  
KBS35.050.075: no knock-out facility (pre-shaped holes).

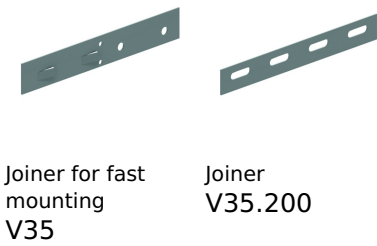

Toothed round  
head bolt / flange  
nut  
VM