


# KBS60

## Perforated cable tray

Alternative perforation  
Return flanges

Standard finish

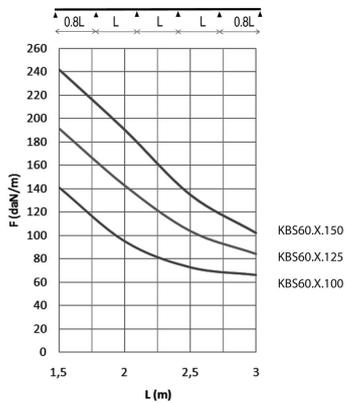

HD	Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
-	<b>ZMKBS60.050.075</b>	60	50	0,75	3000	0,948	60		M
-	<b>ZMKBS60.050.100</b>	60	50	0,90	3000	1,216	60		M
-	<b>ZMKBS60.100.150</b>	60	100	1,50	3000	2,549	60		M
-	<b>ZMKBS60.150.150</b>	60	150	1,50	3000	3,124	30		M
-	<b>ZMKBS60.200.150</b>	60	200	1,50	3000	3,687	30		M
-	<b>ZMKBS60.300.150</b>	60	300	1,50	3000	4,780	30		M
-	<b>ZMKBS60.400.150</b>	60	400	1,50	3000	5,957	30		M
-	<b>ZMKBS60.500.150</b>	60	500	1,50	3000	7,091	30		M
-	<b>ZMKBS60.600.150</b>	60	600	1,50	3000	8,243	30		M
HD	<b>KBS60.050.075</b>	60	50	0,75	3000	0,948	3	X	M
HD	<b>KBS60.050.100</b>	60	50	1	3000	1,216	3	X	M
HD	<b>KBS60.100.150</b>	60	100	1,5	3000	2,549	60	X	M
HD	<b>KBS60.150.150</b>	60	150	1,5	3000	3,124	30	X	M
HD	<b>KBS60.200.150</b>	60	200	1,5	3000	3,687	30	X	M
HD	<b>KBS60.300.150</b>	60	300	1,5	3000	4,780	30	X	M
HD	<b>KBS60.400.150</b>	60	400	1,5	3000	5,957	30	X	M
HD	<b>KBS60.500.150</b>	60	500	1,5	3000	7,091	30	X	M
HD	<b>KBS60.600.150</b>	60	600	1,5	3000	8,243	30	X	M

### Fix with:



Joiner for fast mounting  
V60

Joiner  
V60.200



Toothed round head bolt / flange nut  
VM

### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span. For widths of 300 and up, it is advised to use a stiffening plate.

F = max. admissible load (daN/m)  
L = support distance (m)  
Max. deflection (m) = L/100

Round holes of Ø 16 mm and Ø 19.5 mm provided as opening for the fitting of a gland.

KBS60.050.075 and KBS60.050.100: No knock-out facility (pre-shaped holes). To connect with KPBS.