KG110
Cable tray not perforated

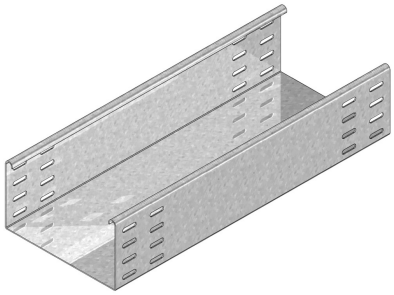

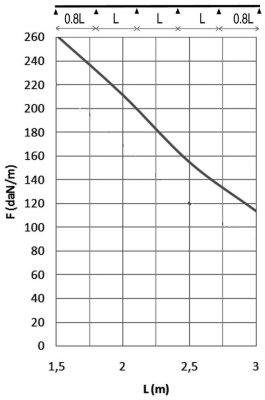

Not perforated
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised

HD	Reference	↕ mm	↔ mm	→‖← mm	⇄ mm	kg/m	📦	Stock	Unit
HD	**KG110.100.150**	110	100	1,5	3000	4,000	18	X	M
HD	**KG110.150.150**	110	150	1,5	3000	4,590	18	X	M
HD	**KG110.200.150**	110	200	1,5	3000	5,180	18	X	M
HD	**KG110.300.150**	110	300	1,5	3000	6,360	18	X	M
HD	**KG110.400.150**	110	400	1,5	3000	7,540	18	X	M
HD	**KG110.500.150**	110	500	1,5	3000	8,710	18	X	M
HD	**KG110.600.150**	110	600	1,5	3000	9,890	18	X	M
-	**ZMKG110.100.150**	110	100	1,50	3000	4014	3		M
-	**ZMKG110.150.150**	110	150	1,50	3000	4603	3		M
-	**ZMKG110.200.150**	110	200	1,50	3000	5191	3		M
-	**ZMKG110.300.150**	110	300	1,50	3000	6369	3		M
-	**ZMKG110.400.150**	110	400	1,50	3000	7546	3		M
-	**ZMKG110.500.150**	110	500	1,50	3000	8724	3		M
-	**ZMKG110.600.150**	110	600	1,50	3000	9901	3		M

LOAD DIAGRAM
This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

For widths > 400 in combination with a cover: Please state explicitly in the order.

Fix with:



Joiner
V110.200



Toothed round head bolt / flange nut
VM