
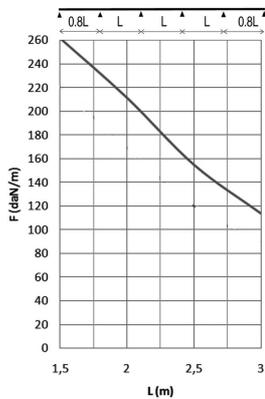


# KG110S

## KG with SIN

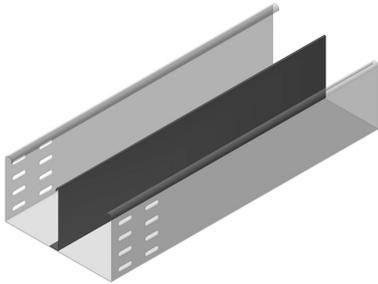

Not perforated  
Return flanges

Standard finish


Pre-galvanised

Optional finish

Hot-dip galvanised

HD Reference	↑ mm	↔ mm	→  ← mm	↔↔ mm	kg/m	📦	Stock	Unit
HD <b>KG110.100.150S12</b>	110	100	1,50	3000	4,820	30		M
HD <b>KG110.100.150S13</b>	110	100	1,50	3000	4,820	30		M
HD <b>KG110.150.150S12</b>	110	150	1,50	3000	5,410	30		M
HD <b>KG110.150.150S13</b>	110	150	1,50	3000	5,410	30		M
HD <b>KG110.150.150S23</b>	110	150	1,50	3000	6,230	30		M
HD <b>KG110.200.150S12</b>	110	200	1,50	3000	6,000	30		M
HD <b>KG110.200.150S13</b>	110	200	1,50	3000	6,000	30		M
HD <b>KG110.200.150S23</b>	110	200	1,50	3000	6,820	30		M
HD <b>KG110.300.150S12</b>	110	300	1,50	3000	7,180	30		M
HD <b>KG110.300.150S13</b>	110	300	1,50	3000	7,180	30		M
HD <b>KG110.300.150S23</b>	110	300	1,50	3000	8,000	30		M
HD <b>KG110.400.150S12</b>	110	400	1,50	3000	8,360	30		M
HD <b>KG110.400.150S13</b>	110	400	1,50	3000	8,360	30		M
HD <b>KG110.400.150S23</b>	110	400	1,50	3000	9,180	30		M
HD <b>KG110.500.150S12</b>	110	500	1,50	3000	9,530	30		M
HD <b>KG110.500.150S13</b>	110	500	1,50	3000	9,530	30		M
HD <b>KG110.500.150S23</b>	110	500	1,50	3000	10,350	30		M
HD <b>KG110.600.150S12</b>	110	600	1,50	3000	10,710	30		M
HD <b>KG110.600.150S13</b>	110	600	1,50	3000	10,710	30		M
HD <b>KG110.600.150S23</b>	110	600	1,50	3000	11,530	30		M

### Fix with:



Joiner  
V110.200



Toothed round  
head bolt / flange  
nut  
VM

### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

S12: one partition in the middle of the cable tray

S13: one partition at right or the left of the cable tray

S23: two partitions

For widths > 400 in combination with a cover: Please state explicitly in the order.