


DATWYLER.WUM

Support Vertical Cable Installation

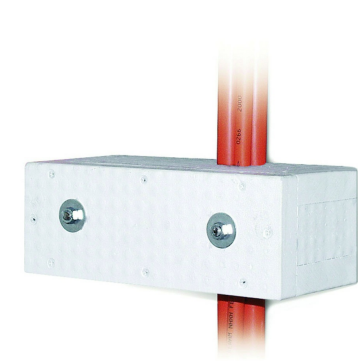

Effective support measure for vertical installation to be used at intervals of up to 3.5 m with DR15.30 rail and cable clamps HDH1. Meandering cable laying is not necessary.
Complies with the DIN4102-12 norm Fire resistance.

HD	Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Unit
-	WUM300.E90	200	470		185	8,000	1		STK
-	WUM400.E90	200	570		185	9,500	1		STK
-	WUM500.E90	200	670		185	9,500	1		STK

Datwyler certificate is available.