


# TFCL110

## Industrial floor trunking

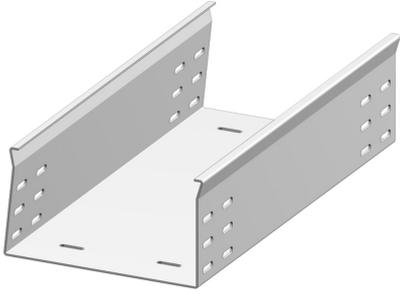

Non-perforated base  
Return flanges

Standard finish

Pre-galvanised


Optional finish

Hot-dip galvanised

HD Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
HD <b>TFCL110.150.200</b>	110	150	2	3000	6,020	30		M
HD <b>TFCL110.200.200</b>	110	200	2	3000	6,820	30		M
HD <b>TFCL110.250.200</b>	110	250	2	3000	7,620	30		M
HD <b>TFCL110.300.200</b>	110	300	2	3000	8,420	30		M

### Fix with:

Application area: The industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.



Joining plate  
V85.200