


WKMP41.41

Bolt-on wall bracket MP41.41

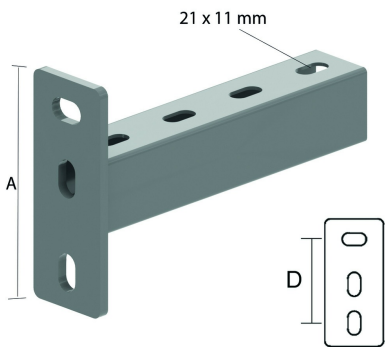

Standard finish	Electro zinc-plated
Optional finish	Hot-dip galvanised

	Max. load (in daN)	A	D
WKMP41.41.300	500	132	93
WKMP41.41.400	350	132	93
WKMP41.41.500	275	132	93
WKMP41.41.600	200	132	93
WKMP41.41.750	180	132	93
WKMP41.41.1000	130	132	93

HD	Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Unit
HD	WKMP41.41.300	132	300			0,900	1	X	STK
HD	WKMP41.41.400	132	400			1,100	1	X	STK
HD	WKMP41.41.500	132	500			1,300	1	X	STK
HD	WKMP41.41.600	132	600			1,500	1	X	STK
HD	WKMP41.41.750	132	750			1,800	1	X	STK
HD	WKMP41.41.1000	132	1000			2,300	1	X	STK

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

When used with cable ladders, please pay attention to the length.