


MPCL41.21

Clippable assembly profile

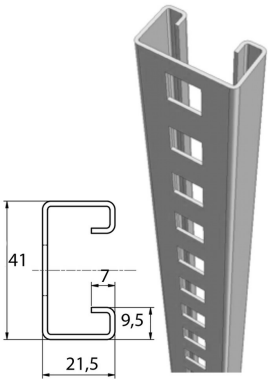

Ideal in combination with the KCL support bracket.

Standard finish		Pre-galvanised							
HD	Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Unit
-	MPCL41.21.150.200	41	21	1,5	210	0,240	10	X	STK
-	MPCL41.21.150.300	41	21	1,5	300	0,340	10	X	STK
-	MPCL41.21.150.400	41	21	1,5	420	0,480	10	X	STK
-	MPCL41.21.150.500	41	21	1,5	510	0,580	10	X	STK
-	MPCL41.21.150.600	41	21	1,5	600	0,680	10	X	STK
-	MPCL41.21.150.800	41	21	1,5	810	0,920	10	X	STK
-	MPCL41.21.150.3	41	21	1,5	3000	1,150	3	X	M

Is preassembled with support brackets, the resulting assembly clips into the KPCL.
Fix the KPCL to the ceiling, then slide in the profile locking it in place.

Protection cap in yellow PVC: DOP41.21.
Always order the width of the cable tray + 50 mm.