


# I6KLM125

## Cable ladder height 125

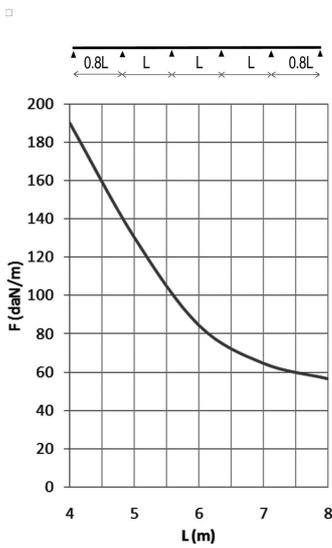

Cable ladder for large support distances up to 8 metres  
Perforated C rungs 41 x 21

Standard finish		Stainless Steel 316							
HD	Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
-	<b>I6KLM125.150</b>	125	150		6000	5,723	6		M
-	<b>I6KLM125.200</b>	125	218	1,5	6000	5,851	60		M
-	<b>I6KLM125.300</b>	125	318	1,5	6000	6,111	60		M
-	<b>I6KLM125.400</b>	125	418	1,5	6000	6,363	60		M
-	<b>I6KLM125.450</b>	125	450		6000	6,491	6		M
-	<b>I6KLM125.500</b>	125	518	1,5	6000	6,619	60		M
-	<b>I6KLM125.600</b>	125	618	1,5	6000	6,875	60		M
-	<b>I6KLM125.750</b>	125	750		6000	7,259	6		M
-	<b>I6KLM125.800</b>	125	800		6000	7,387	6		M
-	<b>I6KLM125.900</b>	125	900		6000	7,644	6		M
-	<b>I6KLM125.1000</b>	125	1000		6000	7,900	6		M

**Fix with:**



Joiner for  
I6KLM125  
I6KLM125KP

Round head  
square neck bolt  
(DIN 603)  
I6RBK



Nut (DIN 934)  
I6M



Giant washer  
(DIN 125-1 A)  
I6RO

Joiner for  
I6KLM100  
I6KLM100KP

**LOAD DIAGRAM**

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)  
L = support distance (m)  
Max. deflection (m) = L/200

**CHARACTERISTICS**

- strong
- usable inner height 102 mm, ideal for large diameter cables
- no further coupling holes are required if the cable ladder is cut
- no joiners are required to attach accessories such as bends, tees etc.
- rungs are perforated to enable efficient attachment of cables
- partition (I6SLOS85) can be fixed to the cable ladder with a sliding nut (I6PNP06) and pan head bolt (I6RB6.20).

**TECHNICAL INFORMATION**

- Side walls are constructed from S profile with a return flange and are continuously perforated
- C-profile rungs are fixed at 250 mm intervals.
  - rungs are mechanically attached to the side wall of the cable ladder.
  - rungs are alternately placed with openings upwards and downwards.

Pickled and passivated.