
I6KSF

Cable Ladder Food and Pharma



Closed tubular tube girders.
Rounded corner profile.

Standard finish						Stainless Steel 316			
HD	Reference	↕ mm	↔ mm	→‖← mm	⇄ mm	kg/m	📦	Stock	Unit
-	**I6KSF200**	60	200		6000	1,968	6		M
-	**I6KSF300**	60	300		6000	2,951	6		M
-	**I6KSF400**	60	400		6000	3,935	6		M
-	**I6KSF500**	60	500		6000	4,919	6		M
-	**I6KSF600**	60	600		6000	5,903	6		M

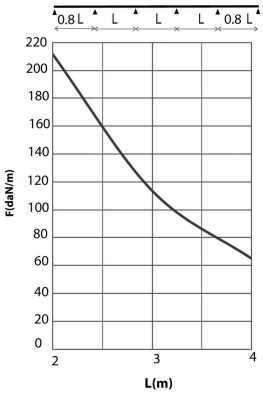

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

CHARACTERISTICS


Ladder for food en pharmaceutical applications.
Special rungs to facilitate water evacuation.

TECHNICAL INFO

Side walls are constructed from tubular section 60 mm x 15 mm.
The rungs have a corner profile rounded off with a radius of 6mm at the top. Rungs are fixed at 250 mm intervals.

Pickled and passivated.

Fix with:



Joiner for I6KSF
I6KSFKP