
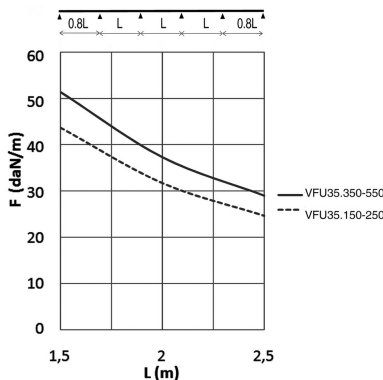
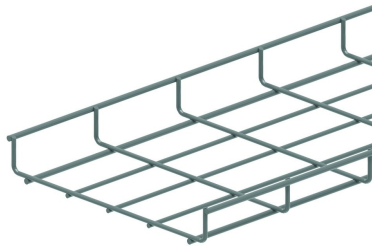


VFU35

Wire cable tray for heavy duty



Screen: 50 x 100 mm

Wire: Ø 4.50 mm and 5.50 mm

Standard finish

Pre-galvanised

Optional finish

HD	Reference	mm	mm	mm	mm	kg/m		Stock	Unit
-	VFU35.150	35	148		3000	1,200	30		M
-	VFU35.250	35	248		3000	1,430	30		M
-	VFU35.350	35	348		3000	1,780	30		M
-	VFU35.450	35	448		3000	2,120	30		M
-	VFU35.550	35	548		3000	2,470	30		M
-	ZAVFU35.150	35	150		3000	1,2	30		M
-	ZAVFU35.250	35	250		3000	1,43	30		M
-	ZAVFU35.350	35	350		3000	1,78	30		M
-	ZAVFU35.450	35	450		3000	2,12	30		M
-	ZAVFU35.550	35	550		3000	2,47	30		M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)


L = support distance (m)

Max. deflection (m) = L/100

Usable inside height: outside height - 9mm

Usable inside width: outside width - 17mm

Fix with:

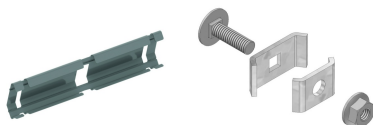

Snap quick-joiner for VFU(L)35
KPVFL35

Joining clamp
VFK