
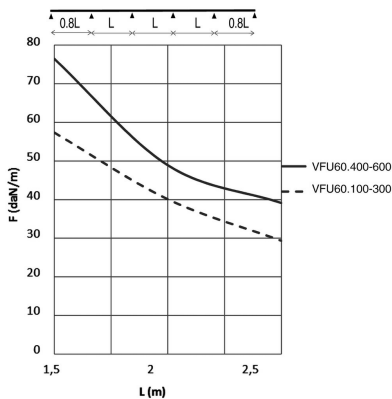
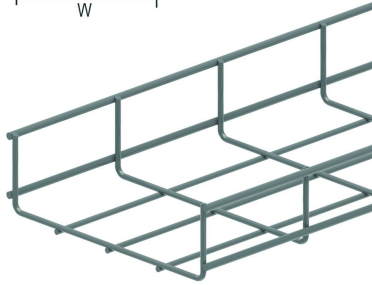


# VFU60

## Wire cable tray for heavy duty



Screen: 50 x 100 mm  
Wire: Ø 4.50 mm and 5.50 mm

Standard finish

Pre-galvanised

Optional finish

| HD | Reference          | mm | mm  | mm | mm   | kg/m  |    | Stock | Unit |
|----|--------------------|----|-----|----|------|-------|----|-------|------|
| -  | <b>VFU60.100</b>   | 60 | 99  |    | 3000 | 1,200 | 30 | X     | M    |
| -  | <b>VFU60.200</b>   | 60 | 199 |    | 3000 | 1,430 | 30 | X     | M    |
| -  | <b>VFU60.300</b>   | 60 | 299 |    | 3000 | 1,780 | 30 | X     | M    |
| -  | <b>VFU60.400</b>   | 60 | 399 |    | 3000 | 2,120 | 30 | X     | M    |
| -  | <b>VFU60.500</b>   | 60 | 499 |    | 3000 | 2,470 | 30 | X     | M    |
| -  | <b>VFU60.600</b>   | 60 | 599 |    | 3000 | 2,810 | 30 | X     | M    |
| -  | <b>ZAVFU60.100</b> | 60 | 100 |    | 3000 | 1,2   | 30 | X     | M    |
| -  | <b>ZAVFU60.200</b> | 60 | 200 |    | 3000 | 1,43  | 30 | X     | M    |
| -  | <b>ZAVFU60.300</b> | 60 | 300 |    | 3000 | 1,78  | 30 | X     | M    |
| -  | <b>ZAVFU60.400</b> | 60 | 400 |    | 3000 | 2,12  | 30 | X     | M    |
| -  | <b>ZAVFU60.500</b> | 60 | 500 |    | 3000 | 2,47  | 30 | X     | M    |
| -  | <b>ZAVFU60.600</b> | 60 | 600 |    | 3000 | 2,81  | 30 | X     | M    |

### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)


L = support distance (m)

Max. deflection (m) = L/100

Usable inside height: outside height - 9mm


Usable inside width: outside width - 17mm

### Fix with:



Support joiner for  
VFU(L)  
VFKS

Snap-on joiner for  
VFU(L)  
KPVF



Joining clamp  
VFK