


VFU85

Wire cable tray for heavy duty

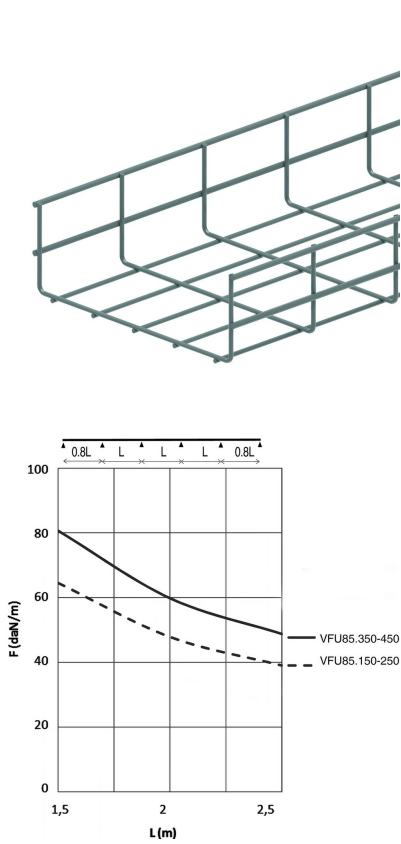

Screen: 50 x 100 mm  
Wire: Ø 4.50 mm and 5.50 mm



Standard finishPre-galvanised

| Optional finish |             |    |     |    |      |       |    |       |      |
|-----------------|-------------|----|-----|----|------|-------|----|-------|------|
| HD              | Reference   | mm | mm  | mm | mm   | kg/m  |    | Stock | Unit |
| -               | VFU85.150   | 85 | 148 |    | 3000 | 1,430 | 30 |       | M    |
| -               | VFU85.250   | 85 | 248 |    | 3000 | 1,780 | 30 |       | M    |
| -               | VFU85.350   | 85 | 348 |    | 3000 | 2,120 | 30 |       | M    |
| -               | VFU85.450   | 85 | 448 |    | 3000 | 2,470 | 30 |       | M    |
| -               | ZAVFU85.150 | 85 | 150 |    | 3000 | 1,43  | 30 |       | M    |
| -               | ZAVFU85.250 | 85 | 250 |    | 3000 | 1,78  | 30 |       | M    |
| -               | ZAVFU85.350 | 85 | 350 |    | 3000 | 2,12  | 30 |       | M    |
| -               | ZAVFU85.450 | 85 | 450 |    | 3000 | 2,47  | 30 |       | M    |

**LOAD DIAGRAM**  
This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)  
L = support distance (m)  
Max. deflection (m) = L/100

Fix with:



Snap-on joiner for VFU(L)  
KPVF

Joining clamp VFK

Usable inside height: outside height - 9mm  
Usable inside width: outside width - 17mm