
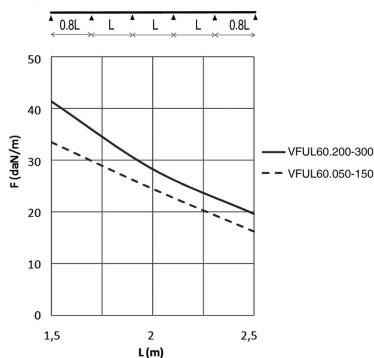
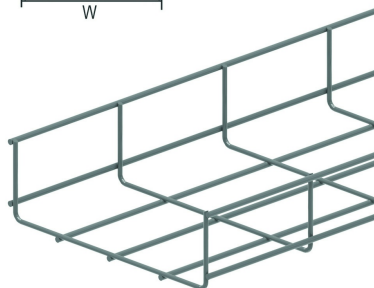


VFUL60

Wire cable tray



Screen: 50 x 100 mm
Cross-wire: Ø 3.50 mm
Lengthwise wire: Ø 4.50 mm

Standard finish

Pre-galvanised

Optional finish

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	Stock	Unit
-	VFUL60.050	60	50		3000	0,570	30	X M
-	VFUL60.100	60	96		3000	0,830	30	X M
-	VFUL60.150	60	146		3000	0,870	30	X M
-	VFUL60.200	60	197		3000	1,030	30	X M
-	VFUL60.300	60	297		3000	1,330	30	X M
-	ZAVFUL60.050	60	50		3000	0,570	30	M
-	ZAVFUL60.100	60	100		3000	0,830	30	M
-	ZAVFUL60.150	60	146		3000	0,870	30	M
-	ZAVFUL60.200	60	197		3000	1,030	30	M
-	ZAVFUL60.300	60	297		3000	1,330	30	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

NEW

Our VFUL60 wire cable tray is now available in zinc aluminium (ZA). This coating offers a corrosion protection at least as long as the standard hot dip galvanizing process.

Zinc aluminum (ZA) is identified with a small plate.


Usable inside height: outside height - 7mm

Usable inside width: outside width - 15mm


Fix with:



Support joiner for
VFU(L)
VFKS



Snap-on joiner for
VFU(L)
KPVF



Joining clamp
VFK