


VFU110

Wire cable tray for heavy duty

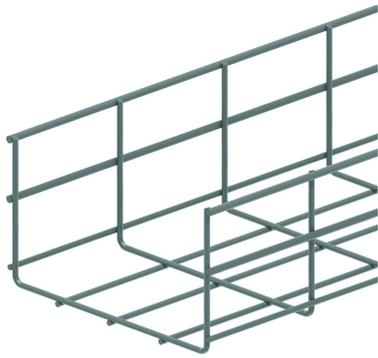


Screen: 50 x 100 mm
Wire: Ø 4.50 mm and 5.50 mm

Standard finish

Pre-galvanised

Optional finish

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
-	VFU110.200	110	199		3000	1,780	30		M
-	VFU110.300	110	299		3000	2,120	30		M
-	VFU110.400	110	399		3000	2,470	30		M
-	ZAVFU110.200	110	200		3000	1,780	30		M
-	ZAVFU110.300	110	300		3000	2,120	30		M
-	ZAVFU110.400	110	400		3000	2,470	30		M

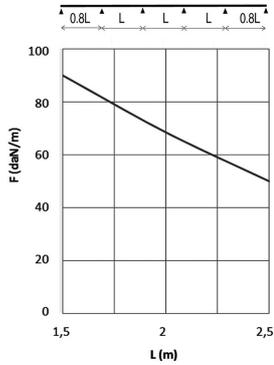

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

Usable inside height: outside height - 9mm

Usable inside width: outside width - 17mm

Fix with:



Snap-on joiner for VFU(L)
KPVF

Joining clamp VFK