



VFU135

Wire cable tray for heavy duty

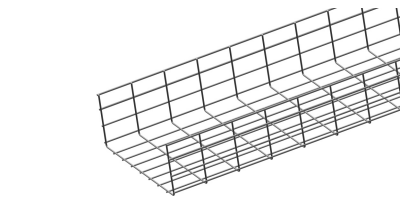

Screen: 50 x 100 mm
Wire: Ø 4.50 mm and 5.50 mm

Fix with:

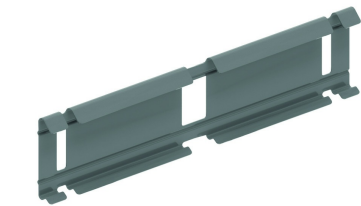

Snap-on joiner for VFU(L)
KPVF

Standard finish		Electro zinc-plated							
HD	Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
-	VFU135.250	135	250		3000	2257	3		M
-	VFU135.350	135	350		3000	2636	3		M
-	VFU135.450	135	450		3000	3015	3		M
-	VFU135.550	135	550		3000	3394	3		M
-	ZAVFU135.250	135	250		3000	2257	3		M
-	ZAVFU135.350	135	350		3000	2636	3		M
-	ZAVFU135.450	135	450		3000	3015	3		M
-	ZAVFU135.550	135	550		3000	3394	3		M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100