
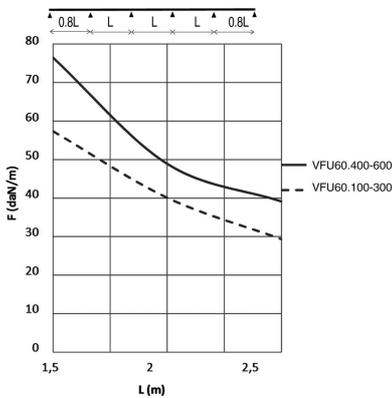
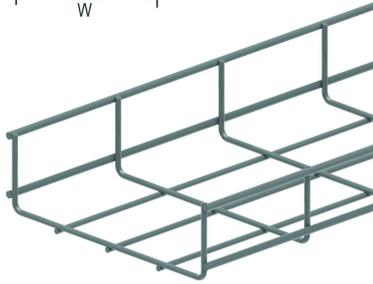


VFU60

Wire cable tray for heavy duty



Screen: 50 x 100 mm
Wire: Ø 4.50 mm and 5.50 mm

Standard finish

Pre-galvanised

Optional finish

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
-	VFU60.100	60	99		3000	1,200	30	X	M
-	VFU60.200	60	199		3000	1,430	30	X	M
-	VFU60.300	60	299		3000	1,780	30	X	M
-	VFU60.400	60	399		3000	2,120	30	X	M
-	VFU60.500	60	499		3000	2,470	30	X	M
-	VFU60.600	60	599		3000	2,810	30	X	M
-	ZAVFU60.100	60	100		3000	1,200	30	X	M
-	ZAVFU60.200	60	200		3000	1,430	30	X	M
-	ZAVFU60.300	60	300		3000	1,780	30	X	M
-	ZAVFU60.400	60	400		3000	2,120	30	X	M
-	ZAVFU60.500	60	500		3000	2,470	30	X	M
-	ZAVFU60.600	60	600		3000	2,810	30	X	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

Usable inside height: outside height - 9mm

Usable inside width: outside width - 17mm

Fix with:



Support joiner for
VFU(L)
VFKS

Snap-on joiner for
VFU(L)
KPVF



Joining clamp
VFK