
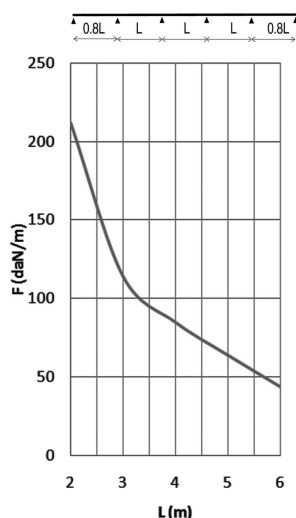


# KBS110.6

## Perforated cable tray

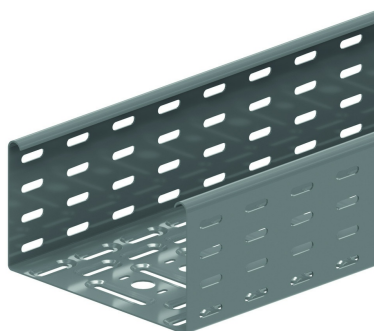

Alternative perforation  
Return flanges  
Support distance up to 6 meter

Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

HD	Reference	mm	mm	mm	mm	kg/m		Stock	Unit
HD	<b>KBS110.200.150.6</b>	110	200	1,5	6000	4,300	24	X	M
HD	<b>KBS110.300.150.6</b>	110	300	1,5	6000	5,280	24	X	M
HD	<b>KBS110.400.150.6</b>	110	400	1,5	6000	6,250	24	X	M
HD	<b>KBS110.500.150.6</b>	110	500	1,5	6000	7,230	24	X	M
HD	<b>KBS110.600.150.6</b>	110	600	1,5	6000	8,210	24	X	M

### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span. For widths of 300 mm and up, it is advised to use a stiffening plate. For span distances > 4 meters, couple the cable trays with KPW.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

### CHARACTERISTICS

Embedded perforations for:

- extra load capacity
- better aeration
- better stability
- better condensation drainage

Alternative perforations for:

- better fixing to supports
- very useful for attaching cables.


### TECHNICAL INFORMATION

The perforation scheme differs according to the width.

Alternative perforation beginning at 200 mm.

Round holes of Ø 16 mm and Ø 19.5 mm provided as opening for the fitting of a gland.


### Fix with:




Joiner for  
KBS110.6  
KPW



Toothed round  
head bolt / flange  
nut  
VM



Joiner  
V110.200



Joiner for  
KBS110.6  
KPW