
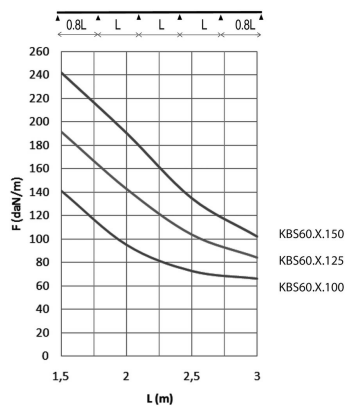


# KBS60

## Perforated cable tray

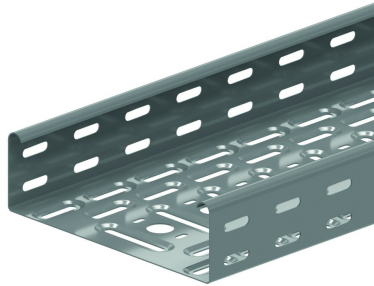

Alternative perforation  
Return flanges

Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

|    |                      | ↑<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/m  | 📦  | Stock | Unit |
|----|----------------------|---------|---------|------------|---------|-------|----|-------|------|
| HD | <b>KBS60.050.075</b> | 60      | 50      | 0,75       | 3000    | 0,930 | 3  | X     | M    |
| HD | <b>KBS60.050.100</b> | 60      | 50      | 1          | 3000    | 1,240 | 3  | X     | M    |
| HD | <b>KBS60.100.150</b> | 60      | 100     | 1,5        | 3000    | 2,350 | 60 | X     | M    |
| HD | <b>KBS60.150.150</b> | 60      | 150     | 1,5        | 3000    | 2,830 | 30 | X     | M    |
| HD | <b>KBS60.200.150</b> | 60      | 200     | 1,5        | 3000    | 3,320 | 30 | X     | M    |
| HD | <b>KBS60.300.150</b> | 60      | 300     | 1,5        | 3000    | 4,300 | 30 | X     | M    |
| HD | <b>KBS60.400.150</b> | 60      | 400     | 1,5        | 3000    | 5,280 | 30 | X     | M    |
| HD | <b>KBS60.500.150</b> | 60      | 500     | 1,5        | 3000    | 6,250 | 30 | X     | M    |
| HD | <b>KBS60.600.150</b> | 60      | 600     | 1,5        | 3000    | 7,230 | 30 | X     | M    |

### LOAD DIAGRAM


This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span. For widths of 300 and up, it is advised to use a stiffening plate.

F = max. admissible load (daN/m)


L = support distance (m)

Max. deflection (m) = L/100

### Fix with:



Joiner for fast  
mounting  
V60



Joiner  
V60.200



Toothed round  
head bolt / flange  
nut  
VM

Round holes of Ø 16 mm and Ø 19.5 mm provided as opening for the fitting of a gland.

KBS60.050.075 and KBS60.050.100: No knock-out facility (pre-shaped holes). To connect with KPBS.