

KGCL60

Cable tray not perforated, clickable


Clickable ends
Closed bottom
Prefabricated click fold

Standard finish

Pre-galvanised

Optional finish

HD	Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
-	KGCL60.075.100	60	75	1	3000	1,700	60		M
-	KGCL60.100.100	60	100	1	3000	1,900	60		M
-	KGCL60.150.100	60	150	1	3000	2,300	30		M
-	KGCL60.200.100	60	200	1	3000	2,700	30		M
-	KGCL60.300.100	60	300	1	3000	3,500	30		M
-	KGCL60.400.100	60	400	1	3000	4,300	30		M
-	ZMKGCL60.075.100	60	75	1	3000	1,700	30		M
-	ZMKGCL60.100.100	60	100	1	3000	1,900	30		M
-	ZMKGCL60.150.100	60	150	1	3000	2,300	30		M
-	ZMKGCL60.200.100	60	200	1	3000	2,700	30		M
-	ZMKGCL60.300.100	60	300	1	3000	3,500	30		M
-	ZMKGCL60.400.100	60	400	1	3000	4,300	30		M

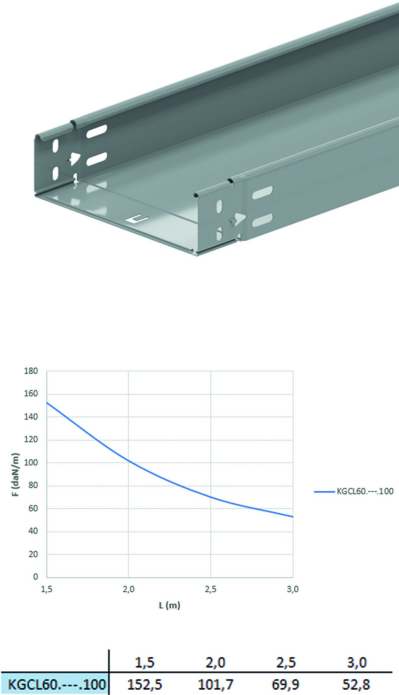

LOAD DIAGRAM
This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100