


KGI60

Cable tray not perforated, interlocking

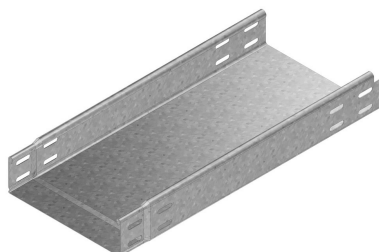

Not perforated
Return flanges

Standard finish

Pre-galvanised

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
-	KGI60.300.125	60	300	1,25	3000	4,300	3	X	M
-	KGI60.400.125	60	400	1,25	3000	5,300	3	X	M
-	KGI60.500.125	60	500	1,25	3000	6,300	3	X	M
-	KGI60.600.125	60	600	1,25	3000	7,300	3	X	M

LOAD DIAGRAM


This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

For widths > 400 in combination with a cover: Please state explicitly in the order.

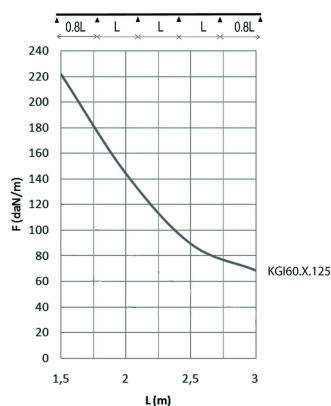

Fix with:



Fast locking for
KBSI
KBV



Toothed round
head bolt / flange
nut
VM