



KGI60S

KGI with SIN

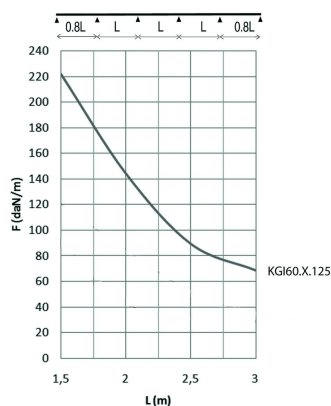

Fix with:

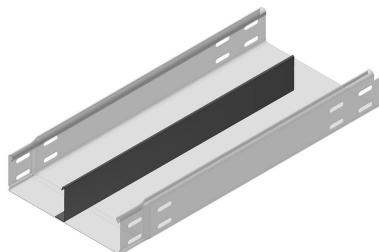

Fast locking for
KBSI
KBV



Toothed round
head bolt / flange
nut
VM

Not perforated
Return flanges

Standard finish

Pre-galvanised

HD	Reference	mm	mm	mm	mm	kg/m	Stock	Unit
-	KGI60.300.125S12	60	300	1,25	3000	4,811	30	M
-	KGI60.300.125S13	60	300	1,25	3000	4,811	30	M
-	KGI60.300.125S23	60	300	1,25	3000	5,322	30	M
-	KGI60.400.125S12	60	400	1,25	3000	5,811	30	M
-	KGI60.400.125S13	60	400	1,25	3000	5,811	30	M
-	KGI60.400.125S23	60	400	1,25	3000	6,322	30	M
-	KGI60.500.125S12	60	500	1,25	3000	6,811	30	M
-	KGI60.500.125S13	60	500	1,25	3000	6,811	30	M
-	KGI60.500.125S23	60	500	1,25	3000	7,322	30	M
-	KGI60.600.125S12	60	600	1,25	3000	7,811	30	M
-	KGI60.600.125S13	60	600	1,25	3000	7,811	30	M
-	KGI60.600.125S23	60	600	1,25	3000	8,322	30	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

S12: one partition in the middle of the cable tray

S13: one partition at right or the left of the cable tray

S23: two partitions

For widths > 400 in combination with a cover: Please state explicitly in the order.