



TFCL110S
TFCL avec SIN

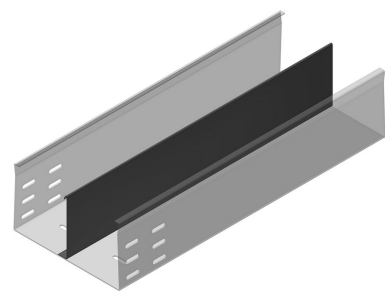

A fixer avec:

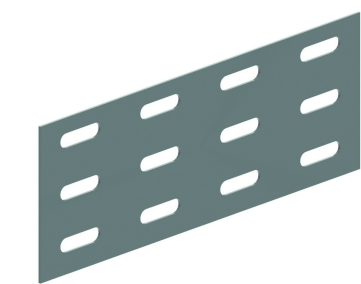

Eclisse à boulonner
V85.200

Exec. Std.		Sendzimir							
Mat. Opt.		Galvanisé à chaud							
HD	Référence	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Magasin	Unité
HD	TFCL110.150.200S12	110	150	2	3000	6,840	30		M
HD	TFCL110.150.200S13	110	150	2	3000	6,840	30		M
HD	TFCL110.150.200S23	110	150	2	3000	7,660	30		M
HD	TFCL110.200.200S12	110	200	2	3000	7,640	30		M
HD	TFCL110.200.200S13	110	200	2	3000	7,640	30		M
HD	TFCL110.200.200S23	110	200	2	3000	8,460	30		M
HD	TFCL110.250.200S12	110	250	2	3000	8,440	30		M
HD	TFCL110.250.200S13	110	250	2	3000	8,440	30		M
HD	TFCL110.250.200S23	110	250	2	3000	9,260	30		M
HD	TFCL110.300.200S12	110	300	2	3000	9,240	30		M
HD	TFCL110.300.200S13	110	300	2	3000	9,240	30		M
HD	TFCL110.300.200S23	110	300	2	3000	10,060	30		M

S12: 1 cloison de séparation séparée au milieu
S13: 1 cloison de séparation séparée sur 1/3 du bord
S23: 2 cloisons de séparation séparée sur 1/3 du bord