


L25.50
Profil en L perforé

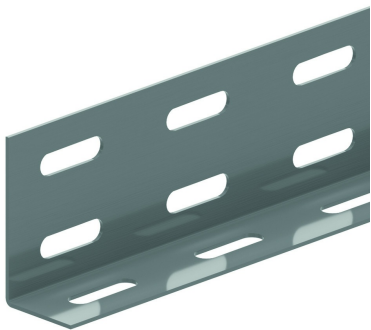

Trous oblongs de 25x7 mm, pas de 50 mm.

Exec. Std.	Sendzimir
Mat. Opt.	Galvanisé à chaud

HD	Référence	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Magasin	Unité
HD	L25.50.125	25	50	1,25	3000	0,643	3		M
HD	L25.50.200	25	50	2	3000	1,034	3		M