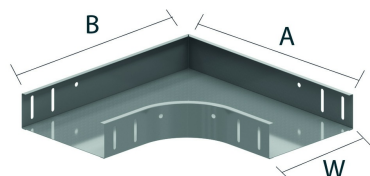


**B90****Courbe horizontale à 90°**

Emboîtables avec le chemin de câbles

Exec. Std.


Sendzimir

Mat. Opt.

|   | 50  | 75  | 100 | 150 | 200 | 300 | 400 | 500 | 600 |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| A | 255 | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |
| B | 255 | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |

**A fixer avec:**

Boulon et écrou  
autobloquant  
VM



Écrou  
autobloquant et  
boulon à collet  
VMK

| HD | Référence           | ↑<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦 | Magasin | Unité |
|----|---------------------|---------|---------|------------|---------|--------|---|---------|-------|
| -  | <b>B90.60.050</b>   | 60      | 50      |            |         | 0,474  | 1 | X       | STK   |
| -  | <b>B90.60.075</b>   | 60      | 75      |            |         | 0,516  | 1 | X       | STK   |
| -  | <b>B90.60.100</b>   | 60      | 100     |            |         | 0,738  | 1 | X       | STK   |
| -  | <b>B90.60.150</b>   | 60      | 150     |            |         | 0,822  | 1 | X       | STK   |
| -  | <b>B90.60.200</b>   | 60      | 200     |            |         | 1,374  | 1 | X       | STK   |
| -  | <b>B90.60.300</b>   | 60      | 300     |            |         | 2,292  | 1 | X       | STK   |
| -  | <b>B90.60.400</b>   | 60      | 400     |            |         | 2,958  | 1 | X       | STK   |
| -  | <b>B90.60.500</b>   | 60      | 500     |            |         | 5,424  | 1 | X       | STK   |
| -  | <b>B90.60.600</b>   | 60      | 600     |            |         | 6,690  | 1 | X       | STK   |
| -  | <b>ZMB90.60.050</b> | 85      | 600     |            |         | 0,88   | 1 |         | STK   |
| -  | <b>ZMB90.60.075</b> | 85      | 500     |            |         | 0,935  | 1 |         | STK   |
| -  | <b>ZMB90.60.100</b> | 60      | 100     |            |         | 1,188  | 1 | X       | STK   |
| -  | <b>ZMB90.60.150</b> | 60      | 150     |            |         | 1,628  | 1 | X       | STK   |
| -  | <b>ZMB90.60.200</b> | 60      | 200     |            |         | 1,925  | 1 | X       | STK   |
| -  | <b>ZMB90.60.300</b> | 60      | 300     |            |         | 2,97   | 1 | X       | STK   |
| -  | <b>ZMB90.60.400</b> | 60      | 400     |            |         | 3,74   | 1 | X       | STK   |
| -  | <b>ZMB90.60.500</b> | 60      | 500     |            |         | 6,49   | 1 | X       | STK   |
| -  | <b>ZMB90.60.600</b> | 60      | 600     |            |         | 7,92   | 1 | X       | STK   |

Nombre minimal des boulons et des écrous: 8 pièces.