


VSB
Coude montant/descendant gaine de sol

A 2 ou 3 compartiments.
Exec. Std.

Sendzimir

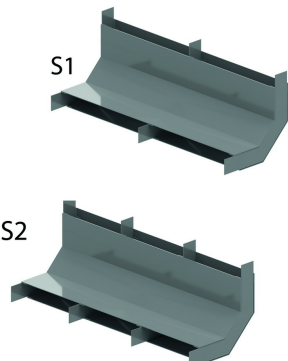

HD	Référence	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Magasin	Unité
-	VSB28.170S1	28	170			0,600	1		STK
-	VSB28.170S2	28	170			0,650	1		STK
-	VSB28.250S1	28	250			0,750	1		STK
-	VSB28.250S2	28	250			0,800	1		STK
-	VSB28.350S1	28	350			1,000	1		STK
-	VSB28.350S2	28	350			1,050	1		STK
-	VSB38.170S1	38	170			0,600	1		STK
-	VSB38.170S2	38	170			0,650	1		STK
-	VSB38.250S1	38	250			0,800	1		STK
-	VSB38.250S2	38	250			0,850	1		STK
-	VSB38.350S1	38	350			1,000	1		STK
-	VSB38.350S2	38	350			1,100	1		STK
-	VSB48.170S1	48	170			0,600	1		STK
-	VSB48.170S2	48	170			0,700	1		STK
-	VSB48.250S1	48	250			0,750	1		STK
-	VSB48.250S2	48	250			0,850	1		STK
-	VSB48.350S1	48	350			1,050	1		STK
-	VSB48.350S2	48	350			1,150	1		STK

Testé selon la norme EN 50085-2-2.
Pour le raccordement de la gaine de sol noyé à la gaine montante.
Aussi utilisable comme pièce descendante.