


# HDWK

## Gelaste wandconsole

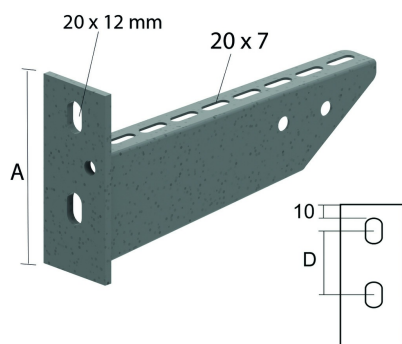


Stand. Uitv.

Hot-Dip

|         | Max. belasting (in daN) | A     | D    |
|---------|-------------------------|-------|------|
| HDWK100 | 120                     | 106,5 | 46,5 |
| HDWK150 | 230                     | 112   | 52   |
| HDWK200 | 340                     | 116   | 56   |
| HDWK300 | 320                     | 125   | 65   |
| HDWK400 | 430                     | 134   | 74   |

| HD | Artikel        | ↕<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦  | Stock | Eenh. |
|----|----------------|---------|---------|------------|---------|--------|----|-------|-------|
| -  | <b>HDWK100</b> | 106     | 117     |            |         | 0,300  | 12 | X     | STK   |
| -  | <b>HDWK150</b> | 112     | 167     |            |         | 0,360  | 12 | X     | STK   |
| -  | <b>HDWK200</b> | 116     | 217     |            |         | 0,430  | 12 | X     | STK   |
| -  | <b>HDWK300</b> | 125     | 317     |            |         | 0,730  | 12 | X     | STK   |
| -  | <b>HDWK400</b> | 134     | 417     |            |         | 0,880  | 6  | X     | STK   |

### Te bevestigen met:




Bout (DIN 933)  
B

Vlakke sluitring  
(DIN 9021)  
CRO



Moer (DIN 934)  
M

Vlakke sluitring  
(DIN 9021)  
CRO



Moer (DIN 934)  
M

Bout (DIN 933)  
B

Voor symmetrische bevestiging, gebruik HDB12.50 + HDCRO12 + HDM12.