


AS

Aftakstuk 90°

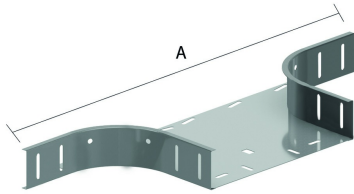

Ineenschuifbaar met de kabelbaan
Stand. Uitv.


	50	75	100	150	200	300	400	500	600
A	458	483	508	558	608	708	808	908	1008

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
-	ZMAS110.100	110	100	0,75		0,691	1		STK
-	ZMAS110.150	110	150	0,75		0,757	1		STK
-	ZMAS110.200	110	200	0,75		0,821	1		STK
-	ZMAS110.300	110	300	0,75		0,944	1		STK
-	ZMAS110.400	110	400	0,75		1,075	1		STK
-	ZMAS110.500	110	500	0,75/0,9		1,407	1		STK
-	ZMAS110.600	110	600	0,75/0,9		1,576	1		STK
-	ZMAS85.100	85	100	0,75		0,600	1		STK
-	ZMAS85.150	85	150	0,75		0,666	1		STK
-	ZMAS85.200	85	200	0,75		0,730	1		STK
-	ZMAS85.300	85	300	0,75		0,853	1		STK
-	ZMAS85.400	85	400	0,75		0,984	1		STK
-	ZMAS85.500	85	500	0,75/0,9		1,316	1		STK
-	ZMAS85.600	85	600	0,75/0,9		1,486	1		STK
-	ZMAS60.100	60	100			0,512	1	X	STK
-	ZMAS60.050	60	50			0,446	1	X	STK
-	ZMAS60.075	60	75			0,479	1	X	STK
-	ZMAS60.150	60	150			0,578	1	X	STK
-	ZMAS60.200	60	200			0,642	1	X	STK
-	ZMAS60.300	60	300			0,765	1	X	STK
-	ZMAS60.400	60	400			0,896	1	X	STK
-	ZMAS60.500	60	500			1,228	1	X	STK
-	ZMAS60.600	60	600			1,398	1	X	STK

Te bevestigen met:



Zelfborgende
moer en bout
VM



Zelfborgende
moer en
kraagbout
VMK

Minimum aantal bouten en moeren: 8 stuks.