


WKMP41.41

Wandconsole MP41.41

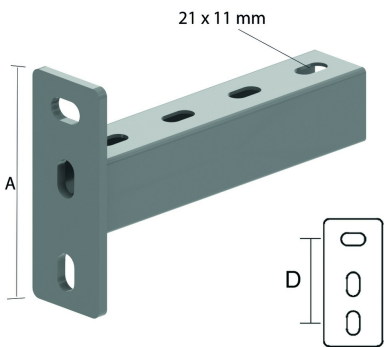

Stand. Uitv.	Elektrolytisch verzinkt
Mat. Opt.	Hot-Dip

	Max. Belasting (in daN)	A	D
WKMP41.41.300	500	132	93
WKMP41.41.400	350	132	93
WKMP41.41.500	275	132	93
WKMP41.41.600	200	132	93
WKMP41.41.750	180	132	93
WKMP41.41.1000	130	132	93

HD Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
HD WKMP41.41.300	132	300			0,900	1	X	STK
HD WKMP41.41.400	132	400			1,100	1	X	STK
HD WKMP41.41.500	132	500			1,300	1	X	STK
HD WKMP41.41.600	132	600			1,500	1	X	STK
HD WKMP41.41.750	132	750			1,800	1	X	STK
HD WKMP41.41.1000	132	1000			2,300	1	X	STK

Max. Belasting (in daN): Gelijkmatig verdeeld over de volledige breedte.

Bij gebruik met kabelladders, let op de lengte.