


I6B90
Horizontale bocht 90°

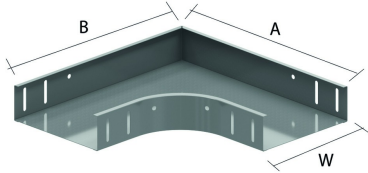

Ineenschuifbaar met de kabelgoot


Stand. Uitv.

Inox 316

| | | | | | | | | |
|---|-----|-----|-----|-----|-----|-----|-----|-----|
| W | 75 | 100 | 150 | 200 | 300 | 400 | 500 | 600 |
| A | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |
| B | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |

| HD | Artikel | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Stock | Eenh. |
|----|---------------------|---------|---------|------------|---------|--------|---|-------|-------|
| - | I6B90.60.100 | 60 | 100 | | | 0,880 | 1 | | STK |
| - | I6B90.60.200 | 60 | 200 | | | 1,450 | 1 | | STK |
| - | I6B90.60.300 | 60 | 300 | | | 2,130 | 1 | | STK |
| - | I6B90.60.400 | 60 | 400 | | | 2,940 | 1 | | STK |

Te bevestigen met:



Zelfborgende moer en bout
 I6VM

Gebeitst en gepassiveerd.