



TFCL60S

TFCL met SIN

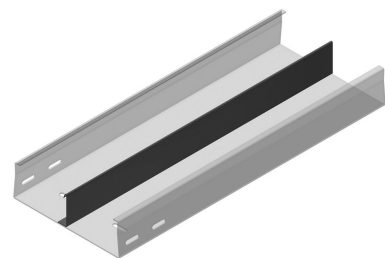

Te bevestigen met:

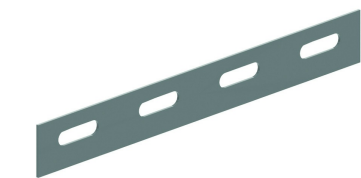

Koppelplaat
V35.200

Stand. Uitv.		Sendzimir							
Mat. Opt.		Hot-Dip							
HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Eenh.
HD	TFCL60.100.200S12	60	100	2	3000	4,161	30		M
HD	TFCL60.100.200S13	60	100	2	3000	4,161	30		M
HD	TFCL60.150.200S12	60	150	2	3000	4,951	30		M
HD	TFCL60.150.200S13	60	150	2	3000	4,951	30		M
HD	TFCL60.150.200S23	60	150	2	3000	5,462	30		M
HD	TFCL60.200.200S12	60	200	2	3000	5,761	30		M
HD	TFCL60.200.200S13	60	200	2	3000	5,761	30		M
HD	TFCL60.200.200S23	60	200	2	3000	6,272	30		M
HD	TFCL60.250.200S12	60	250	2	3000	6,531	30		M
HD	TFCL60.250.200S13	60	250	2	3000	6,531	30		M
HD	TFCL60.250.200S23	60	250	2	3000	7,042	30		M
HD	TFCL60.300.200S12	60	300	2	3000	7,361	30		M
HD	TFCL60.300.200S13	60	300	2	3000	7,361	30		M
HD	TFCL60.300.200S23	60	300	2	3000	7,872	30		M

S12: 1 scheidingsschot in het midden van de kabelgoot
S13: 1 scheidingsschot op 1/3 van de rand van de kabelgoot
S23: 2 scheidingsschotten op 1/3 van de rand van de kabelgoot